


Figure 8 Self-supporting Aerial Cable (GYTC8S)

1、 Cable Drawing

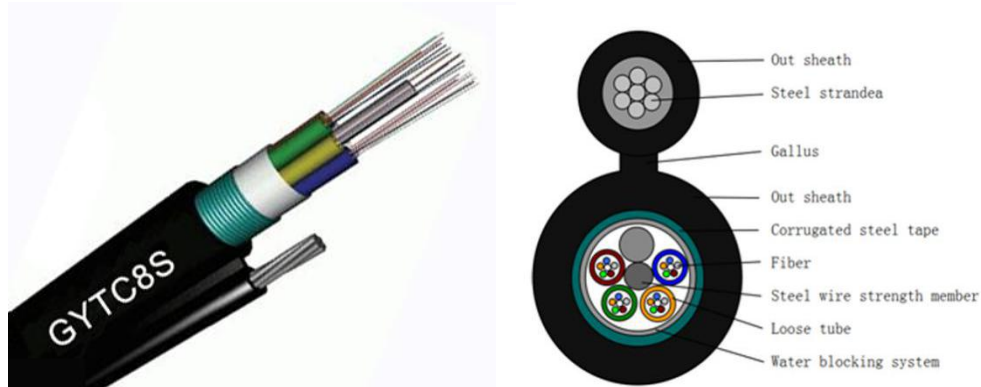

2、 Description

The fibers, either of single-mode or multimode type, are placed in a loose tube made of high modulus plastic. The tubes are filled with a water-resistant filling compound. A steel wire locates in the center of core as a metallic strength member. The tubes (and fillers) are stranded around the strength member into a compact and circular cable core. After PSP is applied around the cable core, this part of cable accompanied with the stranded wires as the supporting part are completed with a polyethylene (PE) sheath to be figure 8 structure.

3、 Features

- Accurate fiber excess length ensure a good performance of tensile strength and temperature;
- High strength loose tube that is hydrolysis resistant and special tube filling compound ensure a critical protection of fiber;
- The following measures are taken to ensure the cable watertight:
 - 1) Steel wire as the central strength member;
 - 2) Loose tube filling compound;
 - 3) 100% cable core filling;
 - 4) PSP enhancing moisture-proof.

4、 Application

- Suitable for aerial, pipeline laying method
- Adopted to outdoor distribution
- Long distance and local area network communication

5、 Specification

1) Fiber Allocation Scheme

Fiber number	Tube number	Fiber per tube	Fiber type
24-144	1-12	2-12 F/Tube	OS1,OS2,OM1,OM2,OM3,OM4

2) Cable construction details

Items		Description
Number of fiber		24-144cores
Moisture Barrier		Water blocking system
Central strength member	Material	FRP
	size	Φ1.4mm*1
Mental strength member	material	Steel wire
	diameter	Φ1.0mm*7
Gallus	material	PE
	diameter	2.2mm*2.8mm
Loose tube	material	PBT
	diameter	Φ2.2(outer/inner)
Tube-filling	material	Tube filling compound
Outer armored	materail	corrugated steel tape
Outer sheath	material	PE,LSZH(can be required)
	diameter	accordance with the Cable

XDK Communication Equipment (Huizhou) Co., Ltd.

		Mechanical characteristic
	color	Black (can be required)

3) Standard color of fiber and tube

The color code of the tubes and the individual fibers, shall be in accordance with the table as below:

Standard Colour Identification						
No.	1	2	3	4	5	6
Color	Blue	Orange	Green	Brown	Slate	White
No.	7	8	9	10	11	12
Color	Red	Black	Yellow	Violet	Pink	Aqua

Note: The color can be required by customers.

4) Cable Mechanical characteristic

Items	Cable diameter	Weight
24 cores to60 cores	5.5*10.0±0.5mm	145 ±5 kg/km
72cores	13.1±0.5mm	290±10kg/km
96cores	14.7±0.5mm	330±10kg/km
144cores	17.9±0.5mm	420±10kg/km
Installation Temperature range	-15--+60°C	
Operation and transport temperature	-40-+70°C	
Min Bending Radius(mm)	Long term	10D
	short term	20D
Allowable Tensile Strength(N)	Long term	3000
	short term	7000
Crush Load (N/100mm)	Long term	1000
	short term	3000

XDK Communication Equipment (Huizhou) Co., Ltd.

5) Requirement for Order:

- (1) Fiber sort: Single mode:G652,G655,G657, Multi mode:OM1,OsM2,OM3,OM4.
- (2) Fiber brand: YOFC, Corning, Fiberhome,Fujikura,OFS etc.
- (3) The fiber and tube color: according to stranded color, can be required.
- (4) The cable Size: shall be in accordance with the table, can be required.
- (5) Length of cable: generally is 2KM, can be required.
- (6) Other requirement: can be negotiated.

6) Fiber Characteristic

Fiber style		Unit	SM 9/125	MM 50/125	MM 62.5/125
condition		nm	1310/1550	850/1300	850/1300
attenuation		dB/km	≤0.36/0.23	≤3.0/1.0	≤3.0/1.0
Dispersion	1310nm	Ps/(nm*km)	≤18
	1550nm	Ps/(nm*km)	≤22
Bandwidth	850nm	MHZ. KM	≥400	≥160
	1300nm	MHZ. KM	≥800	≥500
Zero dispersion wavelength		nm	≥1302, ≤1322
Zero dispersion slope		nm	≤0.091
PMD Maximum Individual Fiber		ps/km	≤0.2
PMD Design Link Value		Ps(nm ² *km)	≤0.08
Fiber cutoff wavelength λ_c		nm	≥1180,≤ 1330
Cable cutoff wavelength λ_{cc}		nm	≤1260
MFD	1310nm	um	9.2±0.4
	1550nm	um	10.4±0.8
Numerical Aperture(NA)			0.200± 0.015	0.275± 0.015

XDK Communication Equipment (Huizhou) Co., Ltd.

Step(mean of bidirectional measurement)	dB	≤0.05	≤0.10	≤0.10
Irregularities over fiber length and point discontinuity	dB	≤0.05	≤0.10	≤0.10
Difference backscatter coefficient	dB/km	≤0.03	≤0.08	≤0.10
Attenuation uniformity	dB/km	≤0.01
Core diameter	um	50±1.0	62.5±2.5
Cladding diameter	um	125.0±0.1	125.0±0.1	125.0±0.1
Cladding non-circularity	%	≤1.0	≤1.0	≤1.0
Coating diameter	um	242±7	242±7	242±7
Coating/chaffinch concentricity error	um	≤12.0	≤12.0	≤12.0
Coating non circularity	%	≤6.0	≤6.0	≤6.0
Core/cladding concentricity error	um	≤0.6	≤1.5	≤1.5
Curl(radius)	um	≤4

6、 Cable marking and cable reel marking

5.1 Cable marking

The cable sheath shall be marked with white characters at intervals of one meter with following information:


- (1) Purchaser' s name
- (2) Cable type
- (3) Fiber type and counts
- (4) Year of manufacture
- (5) Length marking

Notice: cable mark is available if requested by customer.

5.2 Cable reel

Details given below shall be marked with a weather materials on both outer sides of the reel flange :

- (1) Cable type and fiber counts
- (2) Length of cable in meters
- (3) Year of manufacture

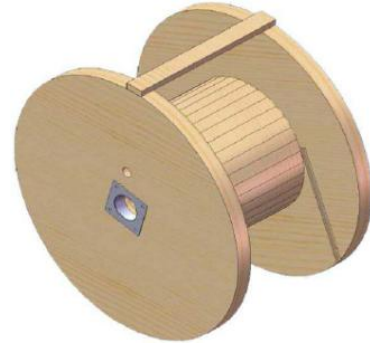

Notice: shipping mark is available if requested by customer.

7、 Packing Informations

- (1) Packing material: Wooden drum
- (2) Packing length: standard length of cable shall be 2 km. Other cable length is also available if required by customer

8、 Our certificates

- (1) ISO9002
- (2) SGS, ROHS
- (3) ULE329066
- (4) REACH

9、 Testing Lab:

No	Device name	No	Device name
1	Optical time domain reflectometer (OTDR)	8	GNZV Cable Torsion Testing Machine
2	Fiber Polarization Mode Dispersion	9	GQNV Cable Flexing Testing Machine
3	Fiber Dispersion ,Strain Tester	10	GJRV Cable Winding Testing Machine
4	High Low Temperature Test Chamber	11	GZDV Cable Vibration Testing Machine
5	Cable Impact Testing Machine	12	Cable Water Penetration Test

XDK Communication Equipment (Huizhou) Co., Ltd.

6	Cable Squash Tensile Testing Machine	13	Fusion Splicer
7	GWQV Cable Bending Tester	14	Cable Water Penetration Test Rig

Fiber Optic Cable Mechanical Performance Testing Laboratory

- (1) Main Testing Type: Precision Test and Mechanical Test.
- (2) Precision Testing Machine: EXFO OTDR, EG&G PMD-440,CD-400.
- (3) Mechanical Performance Testing : Temperature, Impact, Tensile, Bending, Torsion, Flexing, Winding, Vibration, Water Penetration, Fusion Splicer, Water Penetration.

10、 Our advantages:

- (1) Professional cable manufacturer
- (2) About 10 years experiences in cable industry
- (3) MOQ just 1Km
- (4) ISO, UL , ROSH,REACH...certifications
- (5) Can be customized production of fiber optic cable

